

SECTION-B

2. Analyse the continuous beam ABCD shown in Figure 1 if support C settles down by 5 mm. Take $E = 15 \text{ kN/m}^2$. Moment of inertia is constant throughout and is equal to $5 \times 10^9 \text{ mm}^4$.

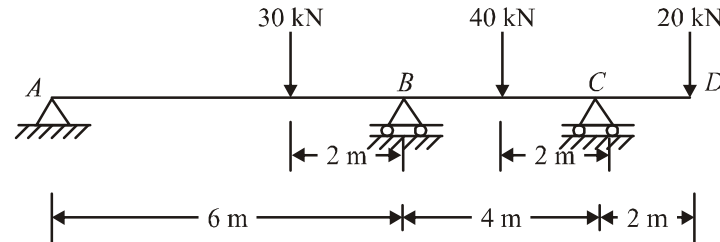


Figure.1

3. Find the force in the member BD of the frame as shown in Figure 2, if the member BD is subjected to a rise in temperature of 16.67°C . Area = 1000 mm^2 and $E = 2 \times 10^5 \text{ N/mm}^2$ for all the members, $\alpha = 12 \times 10^{-6}/^\circ\text{C}$.




Figure.2

4. Determine the influence line for R_a for the continuous beam as shown in Figure 3. Compute I.L ordinates at 1 m intervals.

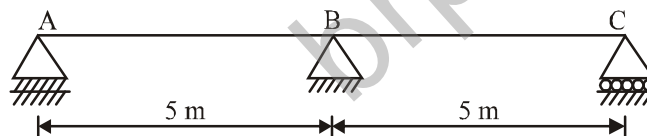


Figure.3

5. A cantilever of uniform flexural stiffness is propped at the remote end. Find the reaction on the prop when a load W is applied at the centre of the cantilever.

6. Analyse the portal frame as shown in Figure 4 by Kani's method. Draw the bending moment diagram and sketch the deflected shape of the frame. Take EI constant for all the members.

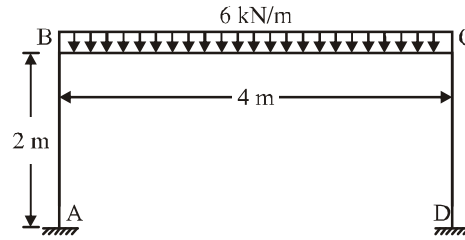


Figure.4

SECTION-C

7. Draw the B.M. diagram and sketch the deflected shape of the frame as shown in Figure 5. All members are of the same material.

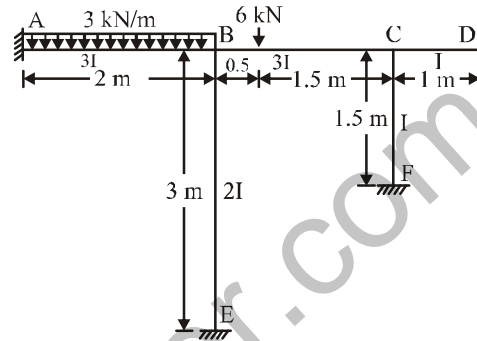


Figure.5

8. For the continuous beam shown in Figure 6, determine the support moments at B and C.




Figure.6

9. A multistoried building as shown in Figure 7, consists of 4 storied 3 bay frames spaced at 3 m c/c. Live load on slab is 3 kN/m^2 and dead load is 3.5 kN/m^2 . The spans of the beams from left to right are 6 m, 4 m and 4 m respectively. Storey height is 3.5 m. Moment of inertia of beams is 1.5 times that of columns. Self-weight of beams is 3.5 kN/m . Determine the maximum moment in the beam at the junction of first span and second span of an intermediate floor.

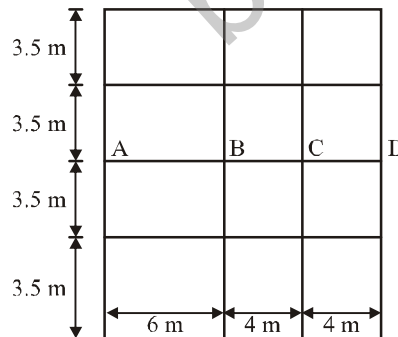


Figure.7